

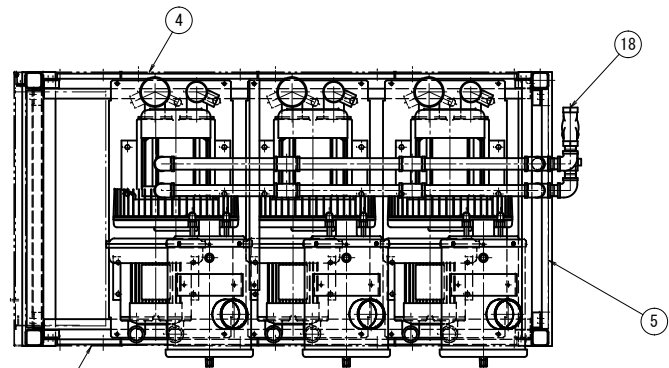
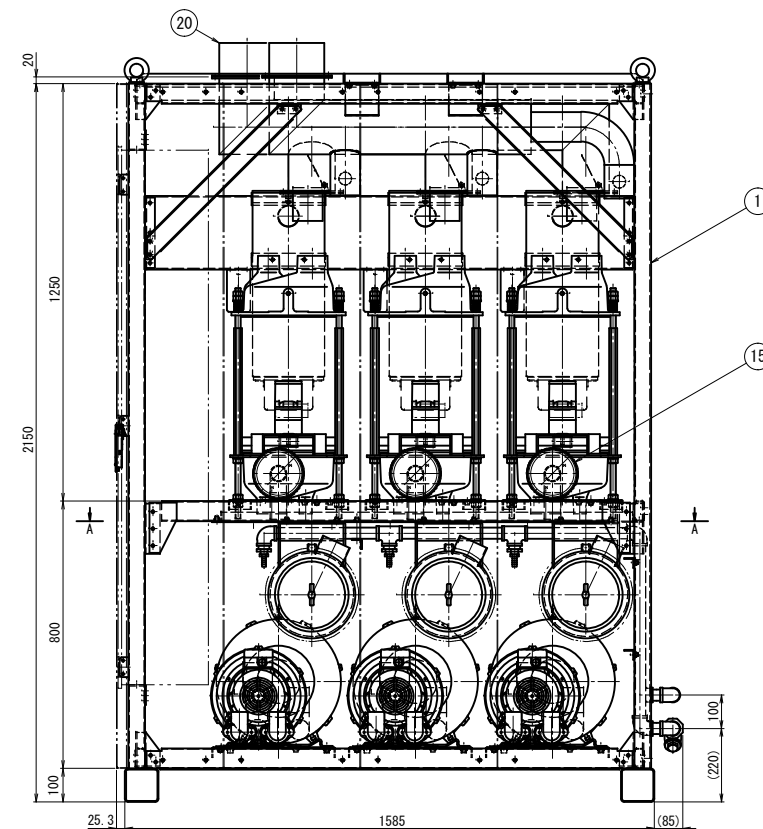


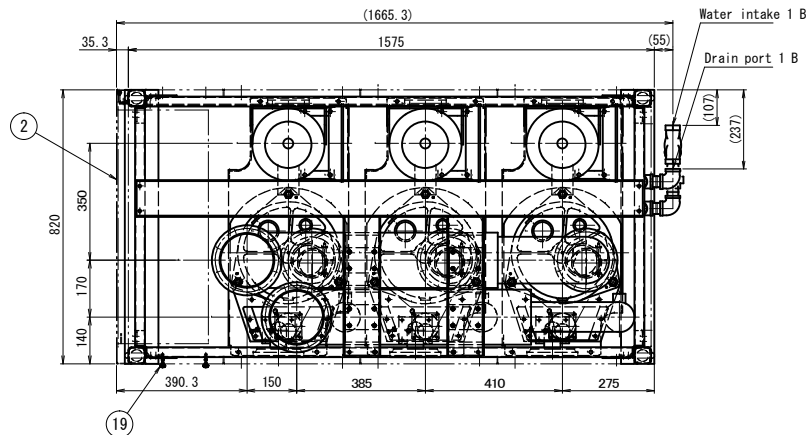

Viewing from A-A

(3 locations)
Dehumidification air outlet
Dehumidification air inlet

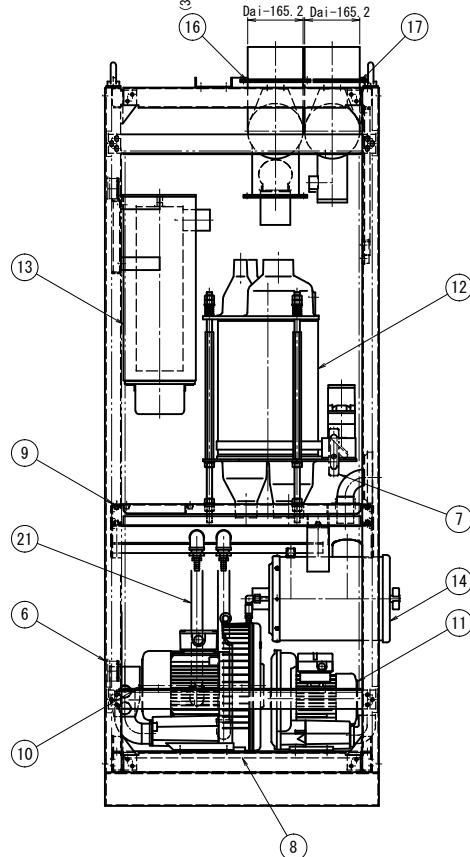

ITEM NO.	DESCRIPTION	REQ. D	MATERIAL	REFERENCE
1	Frame	1	STKR400 SGHC-Z27	
2	Door	1	SPHC	
3	Outer panel R	4	SPHC	
4	Outer panel L	4	SPHC	
5	Outer panel back	1	SPHC	
6	U-shaped reverse hinge type 1	3	TAKIGEN	B-531
7	Flat face handle	1	TAKIGEN	A-240-A-1-1
8	Blower base	3	SGHC-Z27	
9	HoneyComb Base	3	SGHC-Z27	
10	Drying blower	3	RB60-520	Table 1
11	Regeneration blower	3	RB40-520	Table 1
12	Honeycomb roter unit	3	MZC-300H40	Table 1
13	Regeneration heater	3	SUS304 SS400	Table 1
14	Drying filter/Cooler	3	SUS304 SS400	0.84m ² /0.7m ²
15	Regeneration filter	3	ZINC COATED STEEL SGHC-Z27	
16	Dehumidification air outlet	1	SUS304 SS400	Dia-165.2
17	Dehumidification air recovery port	1	SUS304 SS400	Dia-165.2
18	Y-type strainer	1	KITZ	150-type Y1B
19	Foot length knurling knob	36		
20	Connecting short pipe	2	SUS304	Dai-165.2 (150A)
21	Cooling water supply	2		

Table 1. Local specification

ITEM NO.	DESCRIPTION	ASIA AREA		USA AREA
		J VERSION AC200/220, 220V 50/60Hz	A VERSION AC380, 400, 415/380V 50/60Hz	U VERSION AC230, 460V 60Hz
10	Drying blower	RB60-520 AC200-240V/AC380-440V		RB60-53U AC230/460V
11	Regeneration blower	RB40-520 AC200-240V/AC380-440V		RB40-53U AC230/460V
12	Honeycomb roter unit	AC200V		AC100V
13	Regeneration heater	5.5kW/200V 6.65kW/220V	5.5kW/380V 6.55kW/415V	5.5kW/230V 7.4kW/460V

REVISION					
MARK	DATE	CONTENTS	CHKD	APPD	
REF. NO. -A09200					
NAME	DEH. DRYER INTERNAL-GA	FORM	DMZ2-700		
APPROVED BY	MATSUMOT	CODE NO.			
CHECKED BY	SANDEEP	DATE	16.01.2020		
DRAWN BY	S. RAJPUT	UNIT mm	PLANE TRIGONOMETRY		
SCALE	1/8	DWG. NO.	INA000707		
MATSUI TECHNOLOGIES INDIA LIMITED					

Standard dwg.